

SPECIFICATION




■ Features :

- Meet 1U rack mount system
- Universal AC input / Full range
- Active power factor \ge 94%
- Protections:Short circuit/Overload/Over voltage
- Forced air cooling by built-in DC fan
- With power good and fail signal output
- Built-in remote ON-OFF control
- Remote DC sense +5V and +3.3V
- With +5VSB:0 ~ 2.0A max.
- 100% full load burn-in test
- High efficiency
- 2 years warranty




MODEL		IPC-200					
	OUTPUT NUMBER	CH1	CH2	CH3	CH4	CH5	STANDBY
ОИТРИТ	DC VOLTAGE	3.3V	5V	12V	-5V	-12V	5VSB
	RATED CURRENT	15A	25A	13A	0.5A	1A	2A
	CURRENT RANGE	0 ~ 15A	1 ~ 25A	1 ~ 13A	0 ~ 0.5A	0.1 ~ 1A	0 ~ 2A
	RATED POWER	200W continue. Combine power max.:+5V,+3.3V,+12V output shall not exceed 180W max. (The +5 & +3.3Volt combine total output shall not exceed 180W max.) (The -5 & -12Volt combine total output shall not exceed 12W)					
	RIPPLE & NOISE (max.) Note.2		50mVp-p	120mVp-p	100mVp-p	120mVp-p	50mVp-p
	VOLTAGE ADJ. RANGE	CH2: 5.05 ~ 5.5V	Тооптур-р	1201117 μ-μ	1001114 p-p	12011179-9	JOHN P-P
	VOLTAGE TOLERANCE Note.3		±5.0%	±7.0%	±8.0%	±10%	±5.0%
	LINE REGULATION	±1.0%	±1.0%	±1.0%	±2.0%	±2.0%	±1.0%
	LOAD REGULATION	±5.0%	±5.0%	±7.0%	±8.0%	±10%	±5.0%
	SETUP, RISE TIME	800ms, 20ms/230VAC 2500ms, 20ms/115VAC at full load					
	HOLD TIME (Typ.)	16ms/230VAC 16ms/115VAC at full load					
	VOLTAGE RANGE	90 ~ 264VAC					
INPUT		90 ~ 264 VAC 47 ~ 63Hz					
	FREQUENCY RANGE						
	EFFICIENCY (Typ.)	74.5%					
	AC CURRENT (Typ.)	3.5A/115VAC 1.7A/230VAC					
	INRUSH CURRENT (Typ.)	40A/115VAC 80A/230VAC					
	LEAKAGE CURRENT(max.)	3mA/240VAC					
PROTECTION	OVER LOAD	105 ~ 150% rated output power					
		Protection type: Shut down o/p voltage, re-power on to recover					
	OVER VOLTAGE	+3.3V, +5V: 110% ~ 140% of rated voltage; +12V:13.2V ~ 16V Protection type: Shut down o/p voltage, re-power on to recover					
		7					
	SHORT CIRCUIT	All output equipped with short circuit					
		Protection type: Shut down o/p voltage, re-power on to recover					
FUNCTION	POWER GOOD SIGNAL	The TTL compatible signal out with 100ms to 500ms delay after power set up					
	POWER FAIL SIGNAL	The TTL compatible signal will go down at least 1ms before +5V below 4.75V Power off: PS-ON = "Hi" or ">2V"; Power on: PS-ON = "Low" or "<0.5V"					
	PS-ON INPUT SIGNAL	-10 ~ +60°C (Refer to "Derating Curve")					
ENVIRONMENT	WORKING TEMP.						
	WORKING HUMIDITY	20 ~ 90% RH non-condensing -40 ~ +85°C 10 ~ 95% RH					
	STORAGE TEMP., HUMIDITY	-40 ~ +85 € 10 ~ 95% RH ±0.05% / °C (0 ~ 50 °C)					
	TEMP. COEFFICIENT	±0.05% / C (0 ~ 50 C) 10 ~ 500Hz, 2G 10min./1cycle, 60min. each along X, Y, Z axes					
	VIBRATION SAFETY STANDARDS	UL60950-1, TUV EN60950-1 approved					
SAFETY & EMC (Note 4)	WITHSTAND VOLTAGE	I/P-O/P:1.5KVAC I/P-FG:2KVAC					
	ISOLATION RESISTANCE	I/P-O/P. I/P-FG. O/P-FG:50M Ohms / 500VDC / 25°C / 70% RH					
	EMC EMISSION						
	EMC IMMUNITY	Compliance to EN55022 (CISPR22) Class B, Design refer to FCC part 15 Class B, EN61000-3-2,-3 Compliance to EN61000-4-2,3,4,5,6,8,11, EN55024, EN61000-6-2 (EN50082-2), heavy industry level, criteria A					
OTHERS	MTBF						
	m i Di	94.1K hrs min. MIL-HDBK-217F (25°C)					
	CONNECTOR	ATX main power connector * 1ea; +12V power connector * 1ea Peripheral power connector * 3ea; Floppy drive power connector * 1ea					
	00011110						
	COOLING	Forced air ventilation by 4cm DC fan					
	DIMENSION	240*83*40mm (L*W*H)					
	PACKING	1.44Kg; 10pcs/15.4Kg/0.89CUFT					
NOTE	 All parameters NOT specially mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. Ripple & noise are measured at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. Load regulation is measured from 20% to 100% max. Load. The power supply is considered a component which will be installed into a final equipment. The final equipment must be re-confirmed that it still meets EMC directives. For guidance on how to perform these EMC tests, please refer to EMI testing of component power supplies. (as available on http://www.meanwell.com) Derating may be needed under low input voltages. Please check the derating curve for more details. 						



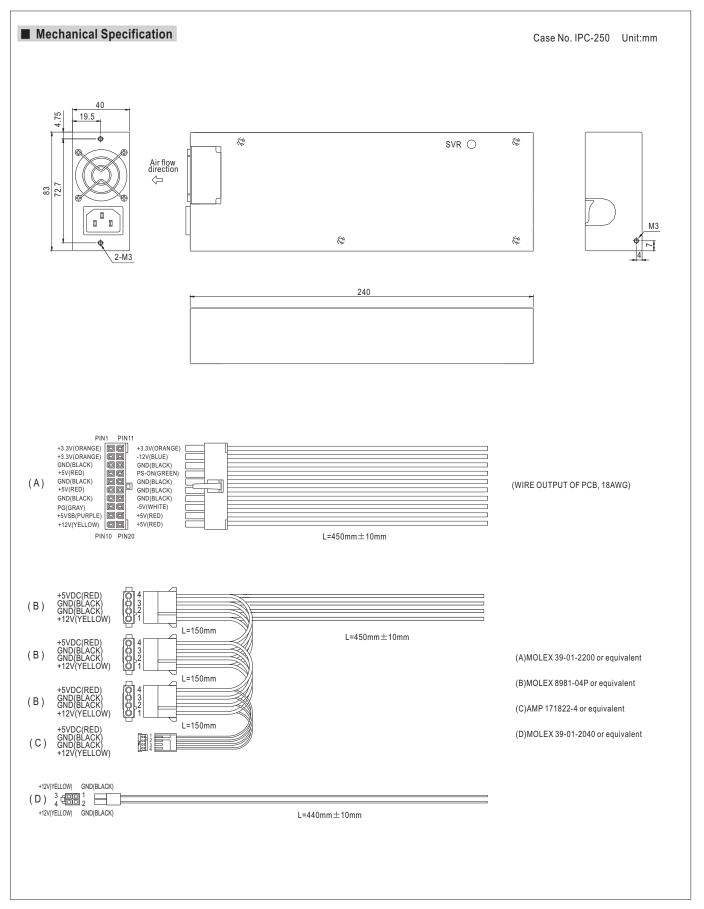



■ Block Diagram

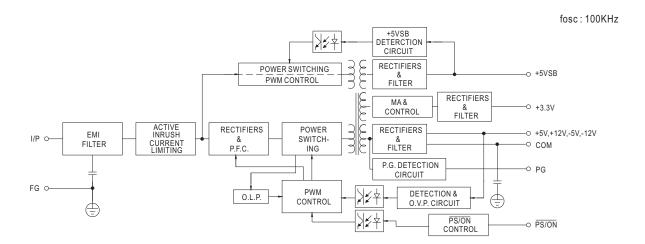

■ Derating Curve

■ Output Derating VS Input Voltage

