

MJ20-RS

Jazz™ Add-on Module RS232/RS485 Communication Port


MJ20-RS Technical Specifications

Communication	1 channel
Galvanic isolation	Yes
Baud rate	300, 600, 1200, 2400, 4800, 9600, 19200 bps
RS232	1 port
Input voltage	±20VDC absolute maximum
Cable length	3m maximum (10 feet)
RS485	1 port
Input voltage	-7 to +12VDC differential maximum
Cable type	Shielded twisted pair, in compliance with EIA RS485
Nodes	Up to 32

Environmental

Operating temperature	0° to 50°C (32° to 122°F)
Storage temperature	-20° to 60° C (-4° to 140°F)
Relative Humidity (RH)	10% to 95% (non-condensing)

Dimensions

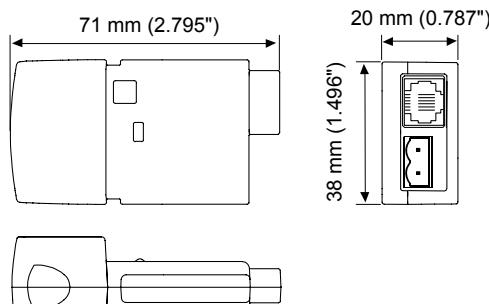


Weight 30g (1.06oz.)

RS232 Pinout

MJ20-RS RJ11 connector

Pin #	Description
1	DTR signal
2	GND
3	TXD
4	RXD
5	GND
6	DSR signal

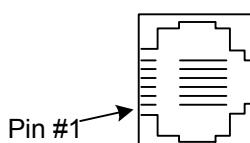

The information in this document reflects products at the date of printing. Unitronics reserves the right, subject to all applicable laws, at any time, at its sole discretion, and without notice, to discontinue or change the features, designs, materials and other specifications of its products, and to either permanently or temporarily withdraw any of the forgoing from the market.

All information in this document is provided "as is" without warranty of any kind, either expressed or implied, including but not limited to any implied warranties of merchantability, fitness for a particular purpose, or non-infringement. Unitronics assumes no responsibility for errors or omissions in the information presented in this document. In no event shall Unitronics be liable for any special, incidental, indirect or consequential damages of any kind, or any damages whatsoever arising out of or in connection with the use or performance of this information.

The tradenames, trademarks, logos and service marks presented in this document, including their design, are the property of Unitronics (1989) (R"G) Ltd. or other third parties and you are not permitted to use them without the prior written consent of Unitronics or such third party as may own them