

























### Features

- · Ultra slim, compact size
- · Medical safety approved (2 x MOPP) according to BS EN/EN60601-1/BS EN/EN60601-1-11
- · Extremely Low leakage current
- · 2 pole EURO plug, Class II power unit
- No load power consumption <0.15W</li>
- Energy efficiency Level VI (except 5~9V for Level V)
- · -30~+70°C wide range working temperature
- Protections: Short circuit / Overload / Over voltage
- · Fully enclosed plastic case
- · Various DC plug quick adapter accessory available (Plug kit sold sperately, please refer to: <a href="https://www.meanwell.com/upload/pdf/DC">https://www.meanwell.com/upload/pdf/DC</a> plug.pdf)
- · 3 years warranty

### Applications

- · Blood glucose meter
- Blood pressure meter
- · Nebulizer
- Inhaler
- Portable medical device
- Sleep apnea devices

### GTIN CODE


MW Search: https://www.meanwell.com/serviceGTIN.aspx

## Description

GSM60E is a 60W ultra slim wall-mounted style single-output green medical adaptor series, which is compact and convenient for carry. GSM60E is a class II power unit (no FG) equipped with the standard 2-Pin European plug, accepting the input range from 80VAC to 264VAC. The whole series provides different models with output voltages ranging between 5VDC and 48VDC that it can satisfy the demands for various types of medical electronic devices. The circuitry design meets the international medical standards (2\*MOPP), having an ultra low leakage current (<100µA), fitting the medical devices in direct electrical contact with the patients.

With the efficiency up to 90% and the extremely low no-load power consumption below 0.15W, GSM60E is compliant with EU ErP and meet CoC version 5 (5~9V for Level V). The supreme feature allows the adaptor to save the energy when it is under either the operating mode or the standby mode. The entire series is approved for international safety regulations; moreover, it adopts the 94V-0 flame retardant plastic case that it can effectively prevent users from electric hazards.

## Model Encoding

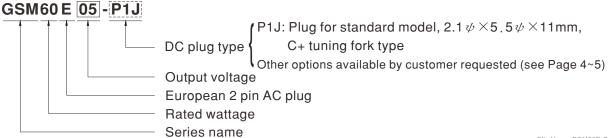



# 60W AC-DC Reliable Green Slim Wall-mounted Medical Adaptor GSM60E series

### **SPECIFICATION**

SAFETY MODEL NO. DC VOLTAGE Note.2	GSM60E05	GSM60E07-P1J				GSM60E18-P1J			
		GSM60E07	GSM60E09	GSM60E12	GSM60E15	GSM60E18	GSM60E24	GSM60E48	
DC VOLIAGE Note.2		7.5V	9V	12V	15V	18V	24V	48V	
RATED CURRENT	6A	6A	5.5A	4.5A	4A	3.33A	2.5A	1.25A	
				0 ~ 4.5A				-	
CURRENT RANGE	0 ~ 6A	0 ~ 6A	0 ~ 5.5A		0 ~ 4A	0 ~ 3.33A	0 ~ 2.5A	0 ~ 1.25A	
RATED POWER (max.)	30W	45W	50W	54W	60W	60W	60W	60W	
RIPPLE & NOISE (max.) Note.3		100mVp-p	100mVp-p	100mVp-p	120mVp-p	120mVp-p	120mVp-p	150mVp-p	
								±3.0%	
				_				±1.0%	
						±2.0%	±2.0%	±2.0%	
	-	1000ms, 100ms, 10ms/230VAC 1000ms, 100ms, 10ms/115VAC at full load							
FREQUENCY RANGE	47 ~ 63Hz								
EFFICIENCY (Typ.)	80%	85%	87%	88%	88%	88%	88%	90%	
AC CURRENT	1.5A / 115VAC 0.8A / 230VAC								
INRUSH CURRENT (max.)	Cold start 50A / 115VAC 100A / 230VAC								
LEAKAGE CURRENT(max.)									
	105 ~ 160% rat	ed output power							
OVERLOAD				matically after fau	ult condition is r	emoved			
		•		mandany artor rat					
OVER VOLTAGE				ıt short					
WORKING TEMP				21 311011					
		•							
	\ /								
ISOLATION RESISTANCE									
EMC EMISSION				, ,		***			
			B:						
	Harmonic current		B			lass A			
	Voltage flicker	Voltage flicker BS EN/EN61000-3-3							
	BS EN/EN55011, BS EN/EN60601-1-2								
	Parameter		St	Standard Tes		est Level / Note			
EMC IMMUNITY	ESD		BS	BS EN/EN61000-4-2 Le		Level 4, 15KV air ; Level 4, 8KV contact			
	RF field susceptibility		В						
	EFT bursts		BS	BS EN/EN61000-4-4 Lev		evel 3, 2KV Line-Line,1KV ineterconnect Lines at 100KHz r			
			BS						
	1 ,								
	,				>95	>95% dip 0.5 periods, 30% dip 25 periods,			
LICE	>5.7 Interruptions 250 periods								
	,								
			20 ()						
	200g; 60pcs / 13kg / CARTON								
	See page 4~5; other type available by customer requested								
CABLE	See page 4~5; other type available by customer requested								
<ul> <li>1.All parameters are specified at 230VAC input, rated load, 25°C 70% RH ambient.</li> <li>2.DC voltage: The output voltage set at point measure by plug terminal &amp; 50% load.</li> <li>3.Ripple &amp; noise are measured at 20MHz by using a 12" twisted pair terminated with a 0.1μf &amp; 47μf capacitor.</li> <li>4.Tolerance: includes set up tolerance, line regulation, load regulation.</li> <li>5.Line regulation is measured from low line to high line at rated load.</li> <li>6.Load regulation is measured from 10% to 100% rated load.</li> <li>7.Derating may be needed under low input voltage. Please check the derating curve for more details.</li> <li>8.The power supply is considered as an independent unit, but the final equipment still need to re-confirm that the whole system complies with the EMC directives. For guidance on how to perform these EMC tests, please refer to "EMI testing of component power supplies."</li> </ul>									
(as available on http://www.	meanwell.com)								
	LINE REGULATION Note.5 LOAD REGULATION Note.6 SETUP, RISE, HOLD UP TIME VOLTAGE RANGE Note.7 FREQUENCY RANGE EFFICIENCY (Typ.) AC CURRENT INRUSH CURRENT (max.) LEAKAGE CURRENT(max.) OVERLOAD  OVER VOLTAGE WORKING TEMP. WORKING HUMIDITY STORAGE TEMP., HUMIDITY TEMP. COEFFICIENT VIBRATION SAFETY STANDARDS ISOLATION LEVEL WITHSTAND VOLTAGE ISOLATION RESISTANCE  EMC EMISSION  EMC EMISSION  EMC IMMUNITY  LIFE ATTORION SAFETY STANDE  LIFE ATTORION SAFETY STANDE  EMC EMISSION  EMC EMISSION  EMC IMMUNITY  LIFE ATTORION SERVICE  1. All parameters are specified 2. DC voltage: The output volt 3. Ripple & noise are measure 4. Tolerance: includes set up to 5. Line regulation is measure 7. Derating may be needed ur 8. The power supply is conside EMC directives. For guidan (as available on http://www. (as available on http://www.	LOAD REGULATION   Note.6   ±5.0%	LINE REGULATION Note.5  LOAD REGULATION Note.6  SETUP, RISE, HOLD UP TIME  1000ms, 100ms, 10ms/230VAC  VOLTAGE RANGE  Note.7  RO-264VAC  113 ~ 370VD  FREQUENCY (Typ.)  80%  85%  AC CURRENT  INRUSH CURRENT (max.)  OVERLOAD  OVER VOLTAGE  WORKING TEMP.  WORKING TEMP.  WORKING HUMIDITY  TEMP. COEFFICIENT  100 ~ 100 % rated output voltage Protection type: Hiccup mode, 110 ~ 140% rated output voltage Protection type: Clamp by zen  WORKING HUMIDITY  30 ~ +70°C (Refer to "Derating  WORKING HUMIDITY  TEMP. COEFFICIENT  100 ~ 30 ~ +85°C, 10 ~ 95% RH non-condensing  STORAGE TEMP, HUMIDITY  SAFETY STANDARDS  ISOLATION LEVEL  WITHSTAND VOLTAGE  IP-O/P:5656VDC  ISOLATION RESISTANCE  IP-O/P:100M Ohms / 500VDC /  Parameter  Conducted emission  Radiated emission  Harmonic current  Voltage flicker  BS EN/EN55011, BS EN/EN60  Parameter  ESD  RF field susceptibility  Woltage dip, interruption  LIFE  3 years: 100% load 40°C, 8houn  MTBF  400Khrs min. MIL-HDBK-217F( DIMENSION  PACKING  200g; 60pcs / 13kg / CARTON  PLUG  See page 4-5; other type availa  1.All parameters are specified at 230VAC input, rated load, 2: 2.DC voltage: The output voltage set at point measure by plu  3.Ripple an oise are measured at 230VAC input, rated load, 2: 2.DC voltage: The output voltage set at point measure by plu  3.Ripple an oise are measured at 230VAC input, rated load, 2: 2.DC voltage: The output voltage set at point measure by plu  3.Ripple an oise are measured at 230VAC input, rated load, 2: 2.DC voltage: The output voltage set at point measure by plu  3.Ripple an oise are measured from 10% to 100% rated load, 2: 2.DC voltage: The output voltage set at point measure by plu  3.Ripple an oise are measured from 10% to 100% rated load, 2: 2.DC voltage: The output voltage set at point measure by plu  3.Ripple an oise are measured from 10% to 100% rated load. 2: 2.DC voltage: The output voltage set at point measure by plu  3.Ripple an oise are measured from 10% to 100% rated load. 2: 2.DC voltage: The output voltage set at point measure by plu  3.Ri	LINE REGULATION Note.5 ±1.0% ±1.0% ±1.0% ±5.0%    LOAD REGULATION Note.6 ±5.0% ±5.0% ±5.0%    SETUP, RISE, HOLD UP TIME    NOUTAGE RANGE Note.7   80 ~ 264VAC   113 ~ 370VDC    FREQUENCY RANGE   47 ~ 63Hz    EFFICIENCY (Typ.)   80%   85%   87%    AC CURRENT   1.5A / 115VAC   0.8A / 230VAC    INRUSH CURRENT (max.)   Touch current < 100µA/264VAC    OVERLOAD   105 ~ 160% rated output power    Protection type : Hiccup mode, recovers auto    OVER VOLTAGE   110 ~ 140% rated output voltage    Protection type : Clamp by zener diode, output working Humidity   20% ~ 90% RH non-condensing    STORAGE TEMP, HUMIDITY   20% ~ 90% RH non-condensing    STORAGE TEMP, HUMIDITY   20% ~ 90% RH non-condensing    STORAGE TEMP, HUMIDITY   30 ~ +85°C, 10 ~ 95% RH non-condensing    SAFETY STANDARDS   10 ~ 500Hz, 2G 10min./1cycle, period for 60mi    SAFETY STANDARDS   10 ~ 500Hz, 2G 10min./1cycle, period for 60mi    SOLATION LEVEL   Pimary - Secondary: 2 x MOPP    WITHSTAND VOLTAGE   I/P-O/P:100M Ohms / 500VDC / 25°C / 70% RH    Parameter   St    Conducted emission   BS    Radiated susceptibility   BS    Conducted susceptibility   BS    Conducted susceptibility   BS    Radiated emission   BS    Rafield susceptibility   BS    Radiated emission   BS    Rafield susceptibility   BS    Rafield susceptibility   BS    Radiated emission   BS    Radiated emis	LINE REGULATION	LINE REGULATION   Note.5   ±1.0%   ±	LINE REGULATION   Note.5   ±1.0%   ±1.0%   ±1.0%   ±1.0%   ±1.0%   ±1.0%   ±1.0%   ±1.0%   ±1.0%   ±1.0%   ±1.0%   ±1.0%   ±1.0%   ±2.0%   ±	LINE REGULATION Notes \$ ±1.0%	



# ■ Derating Curve ■ Static Characteristics 100 90 80 LOAD (%) LOAD (%) 70 60 50 40 10 20 120 130 140 160 180 200 220 240 264 80 100 115 Ta (°ℂ) **INPUT VOLTAGE** ■ Mechanical Specification Unit:mm 75.5 UL2468 16AWG 1000+150/-0mm for 5~18V UL2468 18AWG 1500+150/-0mm for 24~48V $\bigcirc$ $\bigcirc$ 32 2 pole EURO plug





### ■ DC output plug

O Standard plug: P1J

Unit:mm

	P1J		Pin Assignment
	5.5	11±0.5mm	<b>(</b> →C"+"
	2.1		Outside ⊖—⊕ Inside

- O DC plug changeable through:
  - (1) Customization of the standard part with an optional DC plug according to the table (MOQ applicable)
  - (2) Quick adapter accessory (sold separately without MOQ)

Please refer to below table and online selection guide: <a href="https://www.meanwell.com/upload/pdf/DC\_plug.pdf">https://www.meanwell.com/upload/pdf/DC\_plug.pdf</a>

Example quick adapter accessory:







Optional DC plug: (Available in customized cable or quick adapter)

Tuning F	Type No.	А	В	С	Quick Adapter		
Tulling F	Type No.	OD	ID	L	Accessory		
	C	P1I	5.5	2.1	9.5	Aveilable	
	(Straight)	P1L	5.5	2.5	9.5		
A.		P1M	5.5	2.5	11.0		
A B	C	P1IR	5.5	2.1	9.5	Available	
→ F-D		P1JR	5.5	2.1	11.0	(Current rating: 7.5A max.)	
	(Bish seeds)	P1LR	5.5	2.5	9.5		
	(Right-angled)	P1MR	5.5	2.5	11.0		
Barre	Type No.	Α	В	С			
Dane	турстчо.	OD	ID	L			
	. С.	P2I	5.5	2.1	9.5		
		P2J	5.5	2.1	11.0		
Λ.		P2L	5.5	2.5	9.5	None	
A D B	(Straight)	P2M	5.5	2.5	11.0	110110	
В	C	P2IR	5.5	2.1	9.5		
-1 1-		P2JR	5.5	2.1	11.0		
		P2LR	5.5	2.5	9.5		
	(Right-angled)	P2MR	5.5	2.5	11.0		
Lock	Type No.	Α	В	С			
LOCK		OD	ID	L			
. A .	Floating Locking C-	P2S(S761K)	5.53	2.03	12.06	None	
		P2K(761K)	5.53	2.54	12.06	- None	
A D B		P2C(S760K)	5.53	2.03	9.52		
	SWITCHCRAFT original or equivalent	P2D(760K)	5.53	2.54	9.52		
Min. Pir	Type No.	А	В	С			
IVIIII. I II		OD	ID	L			
,A,		P3A	2.35	0.7	11.0	Available	
A A		P3B	4.0	1.7	11.0	(Current rating: 5A max.)	
	EIAJ equivalent	P3C	4.75	1.7	11.0		

### ■ Installation Manual

Please refer to: http://www.meanwell.com/manual.html