



■ Features :

- Universal AC input / Full range (up to 305VAC)
- · Built-in active PFC function
- * High efficiency up to 95%
- Protections: Short circuit / Over current / Over voltage / Over temperature
- Cooling by free air convection
- · OCP point adjustable through output cable or internal potentiometer
- IP67 / IP65 design for indoor or outdoor installations
- * Type HL LED Driver for use in Class I, Division 2 hazardous location luminaires
- Three in one dimming function (1~10Vdc or PWM signal or resistance)
- Suitable for LED lighting and street lighting applications
- · Compliance to worldwide safety regulations for lighting
- Suitable for dry / damp / wet location
- 7 years warranty (Note.10)



















HLG-320H-12 A

Blank: IP67 rated. Cable for I/O connection.

- A: IP65 rated. Output voltage and constant current level can be adjusted through internal potentiometer.
- B: IP67 rated. Constant current level adjustable through output cable with 1~10Vdc or PWM signal or resistance.
- C: Terminal block for I/O connection. Output voltage and constant current level can be adjusted through internal potentiometer.
- D (option): IP67 rated. Timer dimming function, contact MEAN WELL for details.


ODEOLEIO ATION

SPECIFIC	ATION													
MODEL		HLG-320H-12	HLG-320H-15	HLG-320H-20	HLG-320H-24	HLG-320H-30	HLG-320H-36	HLG-320H-42	HLG-320H-48	HLG-320H-54				
	DC VOLTAGE	12V	15V	20V	24V	30V	36V	42V	48V	54V				
	CONSTANT CURRENT REGION Note.4	6~12V	7.5 ~ 15V	10 ~ 20V	12 ~ 24V	15 ~ 30V	18 ~ 36V	21 ~ 42V	24 ~ 48V	27 ~ 54V				
	RATED CURRENT	22A	19A	15A	13.34A	10.7A	8.9A	7.65A	6.7A	5.95A				
	RATED POWER	264W	285W	300W	320.16W	321W	320.4W	321.3W	321.6W	321.3W				
	RIPPLE & NOISE (max.) Note.2	150mVp-p	150mVp-p	150mVp-p	150mVp-p	200mVp-p	250mVp-p	250mVp-p	250mVp-p	350mVp-p				
	VOLTAGE ADJ. RANGE Note.6	10.8 ~ 13.5V	13.5 ~ 17V	17 ~ 22V	21 ~ 26V	26 ~ 32V	32 ~ 39V	38 ~ 45V	43 ~ 52V	49 ~ 58V				
OUTPUT		Can be adjust	ed by internal p	otentiometer A	type and C ty	pe only			'	'				
	CURRENT ADJ. RANGE	11 ~ 22A	9.5 ~ 19A	7.5 ~ 15A	6.67 ~ 13.34A	5.35 ~ 10.7A	4.45 ~ 8.9A	3.8 ~ 7.65A	3.35 ~ 6.7A	2.97 ~ 5.95				
	VOLTAGE TOLERANCE Note.3	±3.0%	±2.0%	±1.5%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%	±1.0%				
	LINE REGULATION	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%				
	LOAD REGULATION	±2.0%	±1.5%	±1.0%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%	±0.5%				
	SETUP, RISE TIME Note.8	2500ms,80ms/115VAC 500ms,80ms/230VAC at full load												
	HOLD UP TIME (Typ.)	15ms at full lo	5ms at full load 230VAC /115VAC											
	1,51,	00 ~ 305VAC 127 ~ 431VDC												
	FREQUENCY RANGE	47 ~ 63Hz												
	POWER FACTOR (Typ.)		PF>0.98/115VAC, PF>0.95/230VAC, PF>0.94/277VAC at full load (Please refer to "Power Factor Characteristic" curve)											
	TOTAL HARMONIC DISTORTION		THD< 20% when output loading ≥ 50% at 115VAC/230VAC input and output loading ≥ 75% at 277VAC input											
	EFFICIENCY (Typ.) (230Vac)	91%	92.5%	93.5%	94%	94%	94.5%	95%	95%	95%				
INPUT	EFFICIENCY (Typ.) (277Vac)	91.5%	93%	94%	94.5%	94.5%	95%	95%	95%	95%				
• .	AC CURRENT (Typ.)	91.5% 93% 94% 94.5% 95% 95% 95% 95% 95% 95% 95%												
	INRUSH CURRENT(Typ.)	COLD START 70A(twidth=1010µs measured at 50% peak) at 230VAC												
	MAX. No. of PSUs on 16A	COLD CITALL I OF THE INTERSPRIED BY ON TO THERE IN STANDARD												
	CIRCUIT BREAKER	1 unit (circuit breaker of type B) / 2 units (circuit breaker of type C) at 230VAC												
	LEAKAGE CURRENT	<0.75mA / 277VAC												
		95~108%												
	OVER CURRENT Note.4	Protection type : Constant current limiting, recovers automatically after fault condition is removed												
	SHORT CIRCUIT	Hiccup mode, recovers automatically after fault condition is removed												
PROTECTION		14 ~ 17V		22.5 ~ 27V	27 ~ 33V	33 ~ 37V	40 ~ 46V	46.5 ~ 53V	53.5 ~ 60V	59 ~ 65V				
	OVER VOLTAGE	Protection tvp	e : Shut down	and latch off o/	p voltage, re-p	ower on to reco	ver							
	OVER TEMPERATURE	Protection type : Shut down and latch off o/p voltage, re-power on to recover Shut down and latch off o/p voltage, re-power on to recover												
	WORKING TEMP.													
	WORKING HUMIDITY	-40 ~ +70°C (Refer to "Derating Curve") 20 ~ 95% RH non-condensing												
ENVIRONMENT	STORAGE TEMP., HUMIDITY	-40 ~ +80°C, 10 ~ 95% RH												
LittinoniiiLiti	TEMP. COEFFICIENT	±0.03%/°C (
	VIBRATION			lo period for 7	72min pach ale	ong X, Y, Z axes	,							
	VIBICATION					•		ID65 or ID67 (o	voont for ULC	220H C tupo				
	SAFETY STANDARDS Note.7	UL8750(type"HL"), CSA C22.2 No. 250.0-08, EN61347-1, EN61347-2-13 independent, IP65 or IP67 (except for HLG-320H C type) approved												
	WITHSTAND VOLTAGE			·										
SAFETY &	ISOLATION RESISTANCE	I/P-O/P:3.75KVAC I/P-FG:2KVAC O/P-FG:1.5KVAC O/P-FG:1.5KVAC O/												
EMC	EMC EMISSION	I/P-O/P, I/P-FG, O/P-FG:100M Ohms / 500VDC / 25°C / 70% RH												
		Compliance to EN55015, EN55022 (CISPR22) Class B, EN61000-3-2 Class C (≧50% load); EN61000-3-3 Compliance to EN61000-4-2,3,4,5,6,8,11, EN61547, EN55024, light industry level (surge 4KV), criteria B												
	EMC IMMUNITY MTBF	<u> </u>				5024, light indu	istry ievei (surç	ge 4KV), criter	іа в					
OTHERO		157.1K hrs mi		K-217F (25°C))									
OTHERS	DIMENSION	252*90*43.8n		т										
	PACKING	1.88Kg; 8pcs/16Kg/0.92CUFT												
NOTE	Ripple & noise are measure Tolerance : includes set up Please refer to "DRIVING N Derating may be needed ur A type and C type only. Safety and EMC design reference.	ed at 20MHz of tolerance, line METHODS OF order low input of the to EN60598	mentioned are measured at 230VAC input, rated load and 25°C of ambient temperature. at 20MHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1uf & 47uf parallel capacitor. lerance, line regulation and load regulation.											


- The power supply is considered as a component that will be operated in combination with final equipment. Since EMC performance will be affected by the complete installation, the final equipment manufacturers must re-qualify EMC Directive on the complete installation again.

 10. Refer to warranty statement.
- 11. To fulfill requirements of the latest ErP regulation for lighting fixtures, this LED power supply can only be used behind a switch without permanently




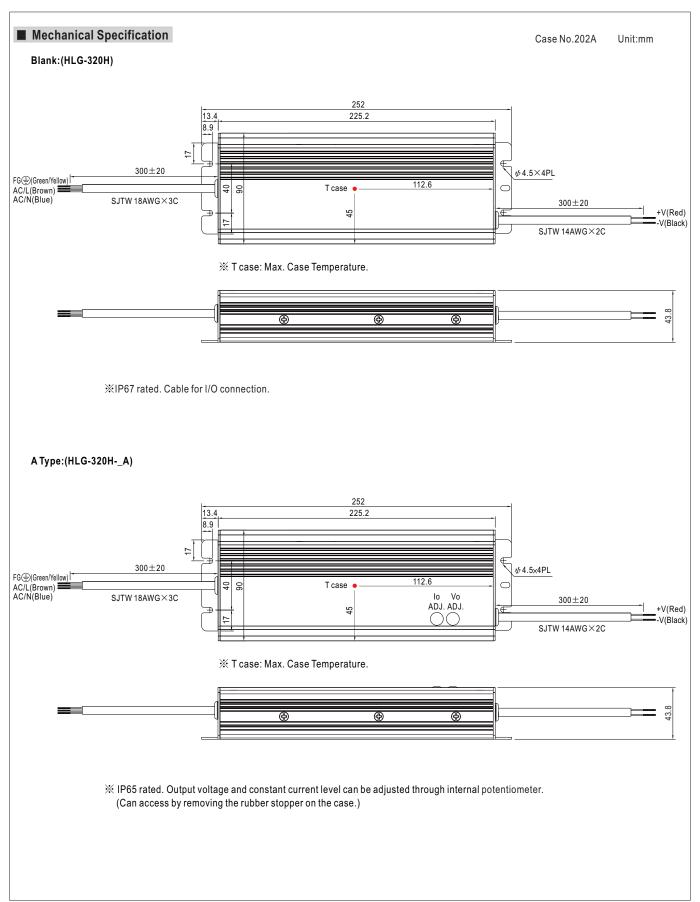




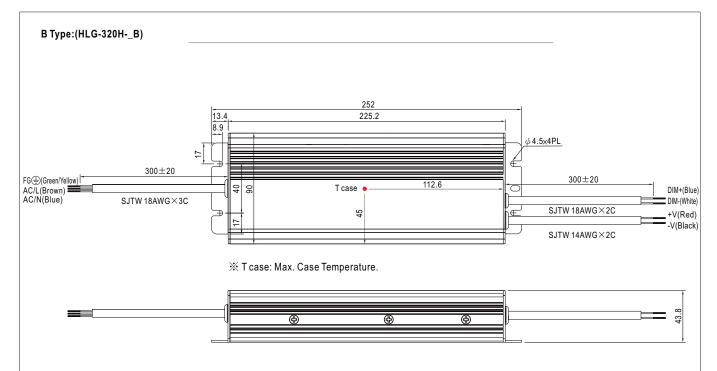

C Type:(HLG-320H-_C)

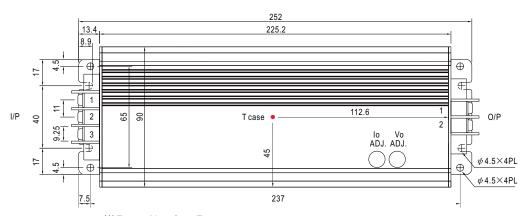

 $\ensuremath{\mathbb{X}}$ T case: Max. Case Temperature.



※ Output voltage and constant current level can be adjusted through internal potentiometer. (Can access by removing the rubber stopper on the case.)


AC Input Terminal Pin No. Assignment

Pin No.	Assignment
1	FG ±
2	AC/L
3	AC/N

DC Output Terminal Pin No. Assignment


Pin No.	Assignment
1	+V
2	-V



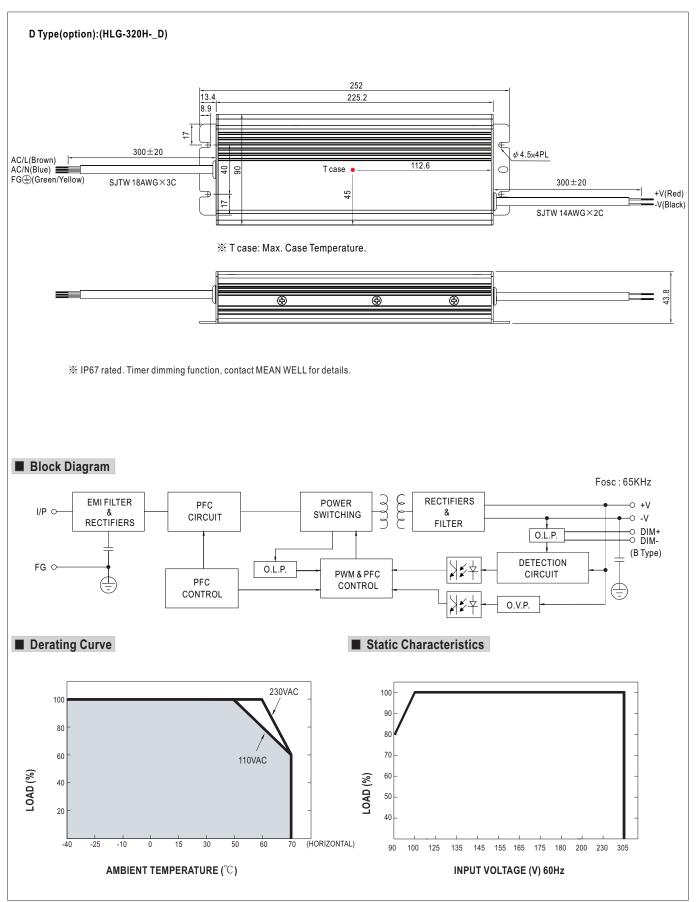




■ Power Factor Characteristic

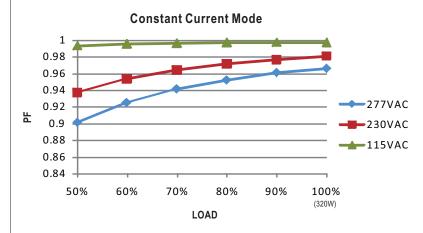

■ EFFICIENCY vs LOAD (48V Model)

HLG-320H series possess superior working efficiency that up to 95% can be reached in field applications.

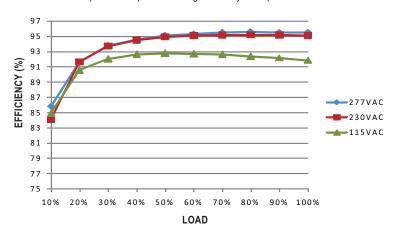


■ DRIVING METHODS OF LED MODULE

There are two major kinds of LED drive method "direct drive" and "with LED driver".

A typical LED power supply may either work in "constant voltage mode (CV) or constant current mode (CC)" to drive the LEDs.

Mean Well's LED power supply with CV+ CC characteristic can be operated at both CV mode (with LED driver, at area (A) and CC mode (direct drive, at area (B).

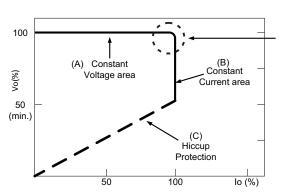

Typical LED power supply I-V curve

In the constant current region, the highest voltage at the output of the driver depends on the configuration of the end systems.

Should there be any compatibility issues, please contact MEAN WELL.



EG (Green/Yellow) AC/L(Brown) AC/N(Blue) DIM+(Blue) HLG-320H DIM+(White) +V(Red) -V(Black)

- Built-in 3 in 1 dimming function, IP67 rated. Output constant current level can be adjusted through output cable by connecting a resistance or 1 ~ 10Vdc or 10V PWM signal between DIM+ and DIM-.
- ※ Please DO NOT connect "DIM-" to "-V".
- * Reference resistance value for output current adjustment (Typical)

Resistance value	Single driver	10K Ω	20ΚΩ	30K Ω	40K Ω	50K Ω	60KΩ	70KΩ	80KΩ	90K Ω	100K Ω	OPEN
	Multiple drivers (N=driver quantity for synchronized dimming operation)	10K Ω/N	20K Ω /N	30K Ω /N	40K Ω/N	50K Ω/N	60K Ω /N	70K Ω /N	80K Ω /N	90K Ω /N	100K Ω/N	
Percentage of rated current		10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

¾ 1 ~ 10V dimming function for output current adjustment (Typical)


Dimming value	1V	2V	3V	4V	5V	6V	7V	8V	9V	10V	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

¾ 10V PWM signal for output current adjustment (Typical): Frequency range: 100HZ ~ 3KHz

Duty value	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	OPEN
Percentage of rated current	10%	20%	30%	40%	50%	60%	70%	80%	90%	100%	95%~108%

- **Using the built-in dimming function on B-type model can't turn the lighting fixture totally dark. Please refer to the connection method below to achieve 0% brightness of the lighting fixture connecting to the LED power supply unit.
- ※Direct connecting to LEDs is suggested, but is not suitable for using additional drivers.

Dimming connection diagram for turning the lighting fixture ON/OFF:

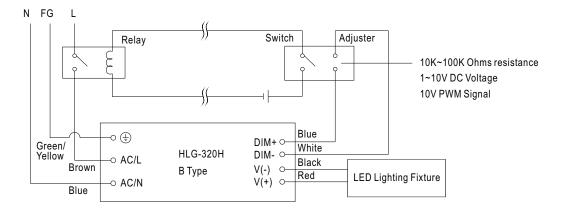

Using a switch and relay can turn ON/OFF the lighting fixture.

- 1.Output constant current level can be adjusted through output cable by connecting a resistance or 1~10Vdc or 10V PWM signal between DIM+ and DIM-.
- 2. The LED lighting fixture can be turned ON/OFF by the switch.


LED Lamp



■ WATERPROOF CONNECTION

Waterproof connector

 $Water proof connector \ can be \ assembled \ on \ the \ output \ cable \ of \ HLG-320H \ to \ operate \ in \ dry/wet/damp \ or \ outdoor \ environment.$

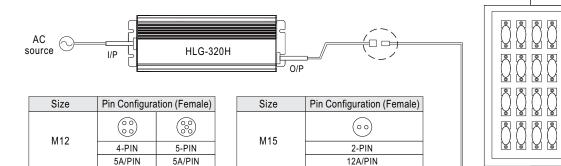


Order No.

Suitable Current

O Cable Joiner

Order No.

Suitable Current

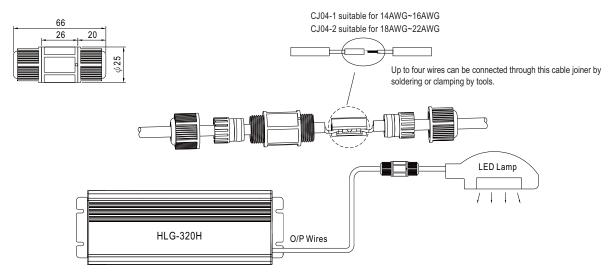

M15-02

12A max

«CJ04 cable joiner can be purchased independently for user's own assembly.

MEAN WELL order No.: CJ04-1, CJ04-2.

M12-05

10A max.

M12-04

10A max.

